


WHERE SHEARWALLS INTERSECT AT CORNERS ATTACH SHEARWALL CHORDS W/ 16D NAILS @ 6" O/C STAGGERED.
SHEARWALLS SHALL ONLY SHARE A COMMON HOLDOWN IF THE GROSS UPLIFT FORCE IS LESS THAN 2,500 LBS PER
EACH SHEAR WALL
TRUSS MANUFACTURERS SHALL BE NOTIFIED OF THE LOCATION AND LATERAL LOADS OF ALL INTERIOR SHEARWALLS.
MECH. LAMINATION OF STUDS SHALL BE 16D NAILS @ 12" O/C SPACING U.N.O.
ALL SILL PLATES ON CONCRETE STEMWALL FOUNDATIONS SHALL BE PRESSURE TREATED 2X6 HF NO. 2 U.N.O.
SHEARWALL BOTTOM PLATES SHALL BE NAILED TO RIM JOIST BELOW WITH (3) 16D NAILS PER 16" BETWEEN STUDS U.N.O.

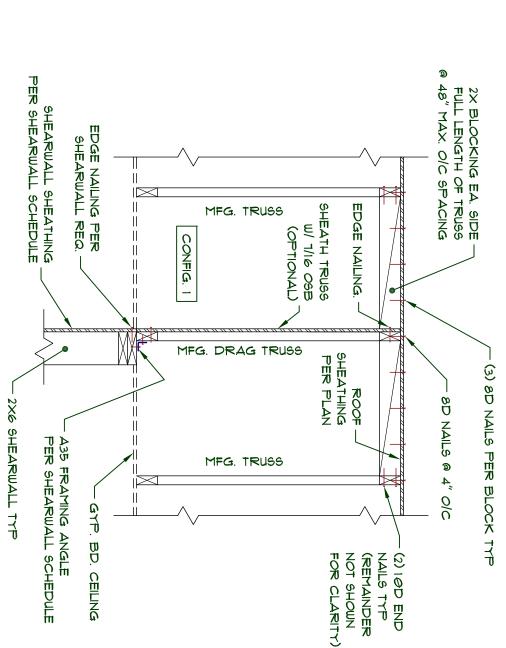

INTERIOR SHEARWALL SCALE: 3/4"=1'-0" PARALLEL TO TRUSSES

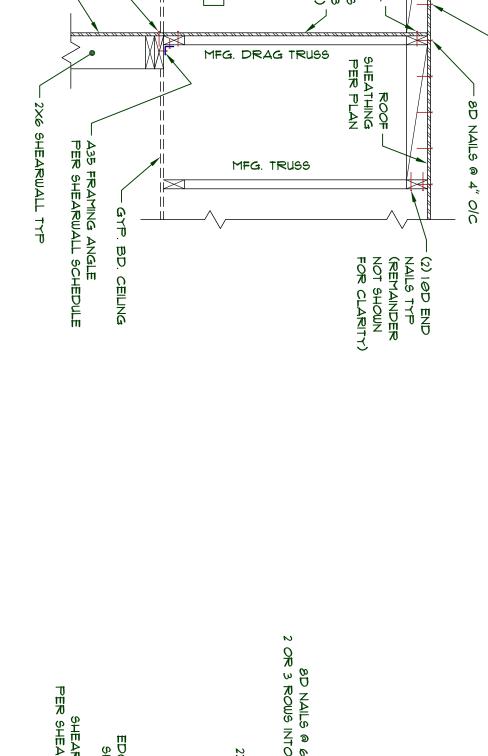

INTERIOR SHEARWALL PARALLEL TO TRUSSES SCALE: 3/4"=1'-0"

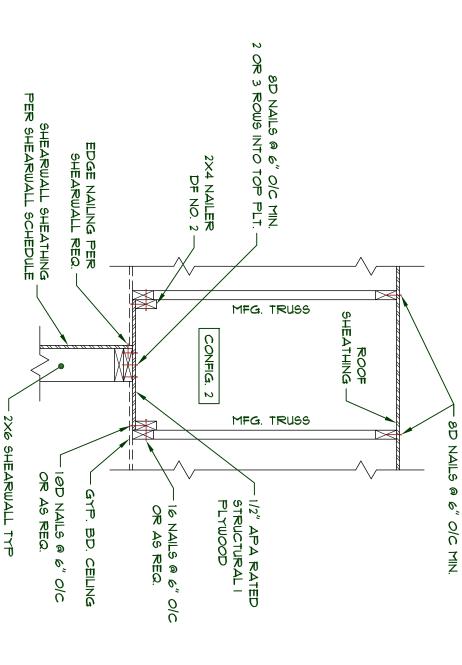

(6) I6D NAILS
STAGGERED
INTO TOP PLT.—

2X6 DF NO. 2
FLAT CROSS
BLOCKING @ 24" O/C—


MFG. TRUSS

MFG. TRUSS

NTERIOR SHEARWALL ARALLEL 9





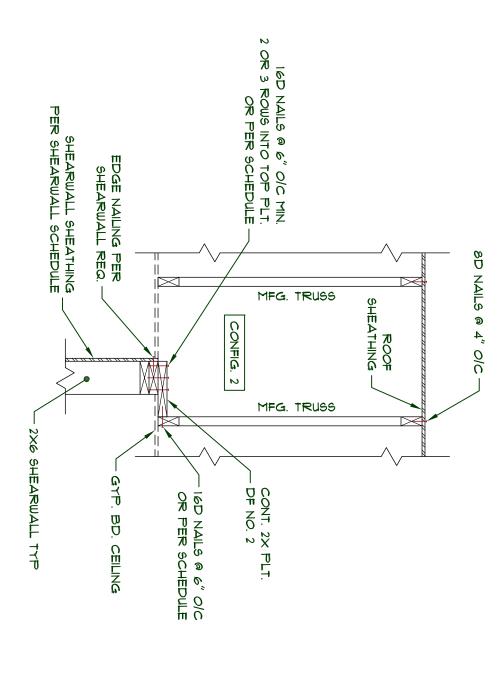

NTERIOR SHEARWALL TRUSSES

w

INTERIOR SHEARWALL PARALLEL

TO TRUSSES

INTERIOR SHEARWALL PARALLEL TO TRUSSES

SHEARWALL SHEATHING

EDGE NAILING PER

SCALE: 3/4"=1'-0"

EDGE NAILING PER

EDGE NAILING.

- (2) I OD END
NAILS TYP
(REMAINDER
NOT SHOWN
FOR CLARITY)

(3) 8D NAILS PER BLOCK

8D NAILS @ 4" O/C

8D NAILS @ 4" O/C

HEATH TRUSS
W/ 7/16 OSB
(OPTIONAL)

MFG. DRAG TRUSS

MFG. TRUSS

MFG. TRUSS

MFG. DRAG TRUSS

MFG. TRUSS

- MFG. ROOF TRUSS BLOCKING © 48" O/C SPACING

- (2) I OD END
NAILS TYP
(REMAINDER
NOT SHOWN
FOR CLARITY)

SHEATH TRUSS -W/ 7/16 OSB (OPTIONAL)

CUSTOMER: REVISION HISTORY:

INTERIOR SHEARWALLS PARALLEL TO TRUSSES DESIGNED BY: NPW 12/22/2014

SHEARWALLS SCALE 1:24

MEDEEK ENGINEERING DESIGN.MEDEEK.COM

SHEET CONTENTS:

PLAN NO.

LOCATION:

REVISION: A.1