

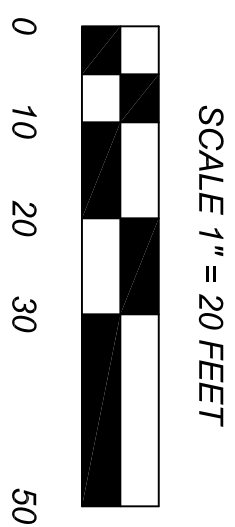




1. PARKING SPACES SHALL BE PAVED AND SHALL BE GRADED AND DRAINED SO AS TO PREVENT SURFACE WATER TO THE SATURATION OF THE CONCRETE ENGINEER AND SHALL BE MAINTAINED IN GOOD CONDITION FREE OF WEEDS, TRASH AND DEBRIS.
2. SURFACE DRAINAGE AND SITE GRADING AND LEVELING BY OTHERS.
3. EACH INDIVIDUAL PARKING SPACE SHALL HAVE A 10' MIN. WIDTH OF 9' MIN. AREA OF 120' HUNDRED (600) SQUARE FEET.
4. PARKING SPACES SHALL BE LOCATED NOT MORE THAN THREE HUNDRED (300) FEET FROM THE BUILDING BEING SERVED.

BLDG. #1 AREA: 2,300 SQFT
BLDG. #2 AREA: 5,000 SQFT
BLDG. #3 AREA: 8,000 SQFT

BLDG. #1: PARKING RATIO: 1 PER 400 SQFT (6 SPACES)
BLDG. #2 & #3: PARKING RATIO: MIN. 4 SPACES (1 PER EMPLOYEE)
PARKING REQUIRED: 10 SPACES (INCL. ONE ADA)
PARKING PROVIDED: 10 SPACES (INCL. ONE ADA)



APPLICANT: CORPORATE NAME
STREET ADDRESS
CITY, STATE 00000 PH. (000) 000-0000

PARCEL: 000000000000
SITE AREA: APPROX. 25 ACRES
ZONING: LIGHT INDUSTRIAL

DESIGNED BY:

NPW

DATE:

3/18/2015

CUSTOMER:	FIRSTNAME LASTNAME
LOCATION:	STREET ADDRESS CITY, STATE 00000

